

531 Rec'd PCT/PTC 09 NOV 2001

US

FORM PTO-1390

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

EXPRESS MAIL LABEL NO.: EL 697 493 660 US

November 9, 2001

TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US)

CONCERNING A FILING UNDER 35 U.S.C. 371

ATTORNEY'S DOCKET NUMBER: GKS Case 373

U.S. APPLICATION NO. 10/031864

(If known, see 37 CFR 1.5): Unknown

INTERNATIONAL APPLICATION NO.: PCT/EP00/04281 INTERNATIONAL FILING DATE: May 11, 2000

PRIORITY DATE CLAIMED: May 12, 1999

TITLE OF INVENTION: FLEXIBLE MILKING TUBE FOR AN AUTOMATIC MILKING PLANT

APPLICANT(S) FOR DO/EO/US: Jakob MAIER, Jr.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(I).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☐ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A **FIRST** preliminary amendment.
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:
 - a) WIPO Publication No. WO 00/69252
 - b) Postal Card

FORM PTO-1390
U.S. APPLICATION NO.
(if known, see 37 CFR 1.53)
Unknown

INTERNATIONAL APPLICATION NO.:

ATTORNEY'S DOCKET NUMBER:

GKS Case 373

531 Rec'd PCT/EP 09 NOV 2001

10/031864 PCT/EP00/04281

17. ☒ The following fees are submitted:

CALCULATIONS PTO USE ONLY

BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)):

Neither international preliminary examination fee (37 CFR 1.482)
nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO
and International Search Report not prepared by the EPO or JPO ... \$1040.00
International preliminary examination fee (37 CFR 1.482) not
paid to USPTO but International Search Report prepared by
the EPO or JPO \$ 890.00
International preliminary examination fee (37 CFR 1.482) not
paid to USPTO but international search fee (37 CFR 1.445(a)(2))
paid to USPTO \$ 740.00
International preliminary examination fee paid to USPTO (37
CFR 1.482) but all claims did not satisfy provisions of PCT
Article 33(1)-(4) \$ 710.00
International preliminary examination fee paid to USPTO (37 CFR
1.482) and all claims satisfied provisions of PCT Article 33(1)-(4).... \$ 100.00

ENTER APPROPRIATE BASIC FEE AMOUNT = \$890.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30
months from the earliest claimed priority date (37 CFR 1.492(e)).

\$

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total claims	- 20 =		X \$ 18.00	\$
Ind. claims	- 3 =		X \$ 84.00	\$
MULTIPLE DEPENDENT CLAIMS (if applicable)			+ \$280.00	\$
TOTAL OF ABOVE CALCULATIONS				= \$890.00

Reduction of 1/2 for filing by small entity, if applicable. Small Entity Statement
must also be filed (Note 37 CFR 1.9, 1.27, 1.28).

- \$ 0.00

SUBTOTAL = \$890.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30
months from the earliest claimed priority date (37 CFR 1.492(f)).

+ \$

TOTAL NATIONAL FEE = \$890.00

Fee for recording assignment (37 CFR 1.21(h)). The assignment must be accompanied
by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property

+ \$ 0.00

TOTAL FEES ENCLOSED = \$890.00

Amount to be refunded \$ N/A

charged \$ N/A

- a. ☒ A check in the amount of \$890.00 to cover the above fees is enclosed.
b. ☐ Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate
copy of this sheet is enclosed.
c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to
Deposit Account No. 06-1382. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a)
or (b)) must be filed and granted to restore the application to pending status.

IN DUPLICATE

SEND ALL CORRESPONDENCE TO:
FLYNN, THIEL, BOUTELL & TANIS, P.C.
2026 Rambling Road
Kalamazoo, Michigan 49008-1699

David G. Boutell
David G. Boutell
Registration Number 25 072:

300.0900

10 Rec'd PERMITS 05 JUN 2002

Express Mail Label No.: None

IN THE U.S. PATENT AND TRADEMARK OFFICE

May 14, 2002

Applicant(s) : Jakob MAIER, Jr.

For : FLEXIBLE MILKING TUBE FOR AN AUTOMATIC MILKING PLANT

PCT International Application No.: PCT/EP00/04281

PCT International Filing Date: May 11, 2000

U.S. Application No.

(if known, see 37 CFR 1.5): 10/031 864

Atty. Docket No.: GKS Case 373

Box PCT

Assistant Commissioner for Patents
Washington, DC 20231

PRELIMINARY AMENDMENT CANCELLING CLAIMS

Sir:

Prior to calculation of the filing fee in the above-identified application, kindly enter the following:

IN THE CLAIMS

5. (Amended) A flexible milk hose according to claim 3,
wherein

the distance between two respective neighbouring reinforcement elements decreases from the middle of the centre piece towards the respective first and second end portions.

6. (Amended) A flexible milk hose according to claim 1,
wherein

the reinforcement elements are implemented as spaced-apart elevations of material enclosing the circumference of the centre piece at least partially.

9. (Amended) A flexible milk hose according to claim 1,
wherein

the first and second end portion have each formed thereon a reinforcement element.

Serial No. 10/031 864 - Page 2

11. (Amended) A flexible milk hose according to claim 1,
wherein

the centre piece consists, at least partially, of a permanently chemically passive and stable material which will not give off secretions to the milk during the milking operation.

13. (Amended) A flexible milk hose according to claim 2,
wherein

the wall thickness of the reinforcement elements is smaller in the area of the middle of the centre piece than the wall thickness of the reinforcement elements arranged in the boundary area of the centre piece.

15. (Amended) A flexible milk hose according to claim 2,
wherein

the wall thickness of the intermediate areas between two neighbouring reinforcement elements in the area of the middle of the centre piece is smaller than the wall thickness of the intermediate areas of the reinforcement elements arranged in the boundary area of said centre piece.

REMARKS

The foregoing amendment effects claim cancellation through the elimination of multiple dependency in order to reduce the filing fee. Entry of the amendment prior to calculation of the filing fee is respectfully requested..

Respectfully submitted,

DGB/jw


David G. Boutell

FLYNN, THIEL, BOUTELL
& TANIS, P.C.
2026 Rambling Road
Kalamazoo, MI 49008-1699
Phone: (616) 381-1156
Fax: (616) 381-5465

Dale H. Thiel
David G. Boutell
Ronald J. Tanis
Terryence F. Chapman
Mark L. Maki
David S. Goldenberg
Sidney B. Williams, Jr.
Liane L. Churney
Brian R. Tumm
Tricia R. Cobb

Reg. No. 24 323
Reg. No. 25 072
Reg. No. 22 724
Reg. No. 32 549
Reg. No. 36 589
Reg. No. 31 257
Reg. No. 24 949
Reg. No. 40 694
Reg. No. 36 328
Reg. No. 44 621

Encl: Marked-Up Version of Claims 5, 6, 9, 11, 13 and 15
336.9804

May 14, 2002

MARKED-UP VERSION OF CLAIMS 5, 6, 9, 11, 13 and 15

5. (Amended) A flexible milk hose according to claims 3-~~or~~
4, wherein

the distance between two respective neighbouring reinforcement elements decreases from the middle of the centre piece towards the respective first and second end portions.

6. (Amended) A flexible milk hose according to claims 1-~~2~~
~~or 5~~, wherein

the reinforcement elements are implemented as spaced-apart elevations of material enclosing the circumference of the centre piece at least partially.

9. (Amended) A flexible milk hose according to claims 1-~~to~~
~~8~~, wherein

the first and second end portion have each formed thereon a reinforcement element.

11. (Amended) A flexible milk hose according to claims 1-~~to~~
~~10~~, wherein

the centre piece consists, at least partially, of a permanently chemically passive and stable material which will not give off secretions to the milk during the milking operation.

13. (Amended) A flexible milk hose according to claims 2-~~to~~
~~10~~, wherein

the wall thickness of the reinforcement elements is smaller in the area of the middle of the centre piece than the wall thickness of the reinforcement elements arranged in the boundary area of the centre piece.

15. (Amended) A flexible milk hose according to claims 2-~~to~~
~~14~~, wherein

the wall thickness of the intermediate areas between two neighbouring reinforcement elements in the area of the middle of the centre piece is smaller than the wall

Serial No. 10/031 864

May 14, 2002

thickness of the intermediate areas of the reinforcement
elements arranged in the boundary area of said centre
piece.

1 1 0 5 1 5 5 4 . 1 1 6 0 5 0 2



PCT WELTORGANISATION FÜR GEISTIGES EIGENTUM
Internationales Büro
INTERNATIONALE ANMELDUNG VERÖFFENTLICHT NACH DEM VERTRAG ÜBER DIE
INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES PATENTWESENS (PCT)

(51) Internationale Patentklassifikation ⁷ : A01J 5/04	A1	(11) Internationale Veröffentlichungsnummer: WO 00/69252 (43) Internationales Veröffentlichungsdatum: 23. November 2000 (23.11.00)
(21) Internationales Aktenzeichen: PCT/EP00/04281 (22) Internationales Anmeldedatum: 11. Mai 2000 (11.05.00) (30) Prioritätsdaten: 199 22 131.6 12. Mai 1999 (12.05.99) DE (71)(72) Anmelder und Erfinder: MAIER, Jakob, Jun. [DE/DE]; Griesstrasse 4, D-86842 Türkheim (DE). (74) Anwalt: PFAU, Anton; Grünecker, Kinkeldey, Stockmair Schwanhäusser, Maximilianstrasse 58, D-80538 München (DE).	(81) Bestimmungsstaaten: CA, US, eurasisches Patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches Patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Veröffentlicht <i>Mit internationalem Recherchenbericht. Vor Ablauf der für Änderungen der Ansprüche zugelassenen Frist; Veröffentlichung wird wiederholt falls Änderungen eintreffen.</i>	

(54) Title: FLEXIBLE MILKING TUBE FOR AN AUTOMATIC MILKING PLANT


(54) Bezeichnung: FLEXIBLER MILCHSCHLAUCH FÜR EINE AUTOMATISCHE MELKANLAGE

(57) Abstract

The invention relates to an automatic milking plant that is provided with a short milking tube (4). Said milking tube has a sufficient mechanical stability vis-à-vis pressure differences and a high flexibility due to spaced apart elevations in its middle piece (11). The use of the inventive short milking tube reduces the mechanic strain on the udder and thus also reduces irritations of the cow to be milked.

(57) Zusammenfassung

Eine automatische Melkanlage weist einen kurzen Milchschauch (4) auf, der durch beabstandete Erhebungen in seinem Mittelstück (11) sowohl ausreichende mechanische Stabilität gegenüber Druckdifferenzen als auch eine hohe Flexibilität aufweist. Die Verwendung des erfindungsgemäßen kurzen Milchschauchs führt zu einer Verringerung der mechanischen Belastung des Euters und damit zur Reduzierung unerwünschter Reize auf die zu melkende Kuh.

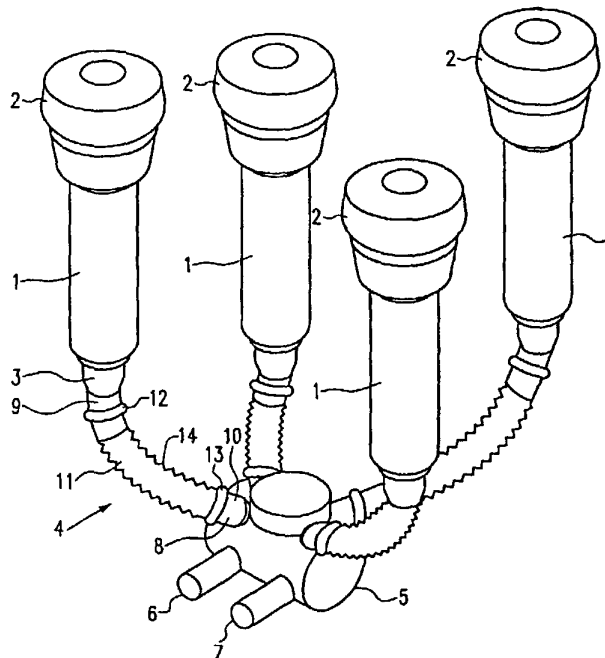

80 Rec'd PCT/PTC 10 5 JUN 2002

A flexible milk hose for an automatic milking plant

The present invention relates to a milk hose for establishing a fluid connection, especially for connecting a teat cup to a multiway valve in an automatic milking plant.

The increasing globalization of the agrarian markets necessitates an increasing degree of rationalization also in agricultural enterprises. Milk producing enterprises use therefore almost exclusively automatic milking plants. Hence, these plants have, on the one hand, the function of markedly increasing the milking capacity, i.e. they should be able to milk more animals per unit time, so as to increase the productivity of the agricultural enterprise, and, on the other hand, the physical and also the psychical strain to which the animals are subjected by the mechanical milking process should be reduced to a minimum by these plants.

An ideal milking plant should therefore be capable of processing during the milking operation a big flow of milk adapted to the standard of today's top cows, and, in so doing, it should simulate the natural sucking of a calf on its mother's udder. Only a milking process which simulates natural sucking will guarantee a complete evacuation of the udder and therefore a high yield of milk, the health of the teat and of the udder as well as mental well-being of the animal, which will also result in higher yields of milk in the long run. Any kind of treatment and any device which may cause the animal to feel uncomfortable should be avoided during the milking process. In particular the area of the milking plant which is in contact with the animal's teats directly or indirectly should be implemented such that the animal is not subjected to any irritation at all.

In the nowadays almost exclusively used milking plants the milk is extracted from the teat during the suction phase by means of a teat cup lined with a soft teat rubber. During this suction phase the teat cup clings to the teat only due to the operational vacuum prevailing in the plant. The extracted milk then flows through a connection hose, the so-called short milk hose, into a multiway valve, and from this multiway valve it is advanced into different line systems or collecting receptacles. During a second phase, the so-called relief phase, air at atmospheric pressure is introduced into the space between the teat rubber and the teat cup via a thin flexible hose so that the teat rubber will contract due to the negative pressure prevailing therein and interrupt the flow of milk from the teat to the outlet of the teat cup. In this phase, part of the teat rubber clings softly to the teat and the adherence of

the teat cup to the teat is increased by the friction occurring between the teat and the teat rubber in addition to the still existing vacuum.

The change over from the suction phase to the relief phase takes place approx. 60 times per minute and leads to light shocks or vibrations due to the pressure fluctuations occurring during the change from one phase to the other and due to the change in the conditions under which the teat cup adheres to the teat. Due to the varying conditions under which the teat cup adheres to the teat, it is in Germany normally common practice to operate the milking plant in an alternating two-phase mode, i.e. two teat cups are in the suction phase, whereas the other two are in the relief phase.

The teat cups are mechanically coupled to the multiway valve essentially via the four short milk hoses and, consequently, they are also mechanically coupled to one another. Since the short milk hoses have to transfer the flow of milk as well as the operating vacuum, an interior diameter of approx. 9-11 mm proved to be advantageous in existing plants. In addition, the ordinance concerning milk production demands that foreign matter originating from lines or receptacles must not be transferred into the milk. Since the milk hoses are produced from plastic material so as to guarantee the highest possible flexibility, the requirements on a high mechanical stability on the one hand (the interior diameter of the milk hose must not undergo any substantial deformations at a negative pressure of approx. 0.5-0.7 bar so as to avoid a negative influence on the flow velocity of the flow of milk) and the chemical passivity of the hose material on the other hand (the use of certain additives causing a stability of the material in the case of small wall thicknesses is not allowed) lead to embodiments of the milk hose having a comparatively large wall thickness. This has the consequence that the originally desired flexibility of the short milk hoses is markedly restricted. Hence, a comparatively strong mechanical coupling exists between the four teat cups via the milk hoses and via the multiway valve, and this has the effect that a change in the external conditions at one teat will also affect all the other teat cups. The comparatively rigid connection between the individual teat cups has e.g. the effect that, due to the different degrees of evacuation of the udder quarters during the milking process, in the course of which one teat cup gradually moves upwards ("climbs") until the edge of its opening is stopped by the udder, the other teat cups will be affected as well. This leads to tensions at the udder and therefore to an irritation of the animal and it may cause a premature interruption of the flow of milk in the case of the udder quarters which have not yet been emptied.

In addition, the constant twisting and bending forces acting on the short milk hoses entail a high degree of wear of the short milk hoses and a resultant fracture of the material, in particular at the transition points to the connection necks leading to the teat cups and the directional valve, respectively.

It is therefore the object of the present invention to provide short milk hoses which fulfil the requirements mentioned at the beginning more effectively than the conventional milk hoses used.

According to the present invention this object is achieved in that a flexible milk hose is provided, which is characterized in that it comprises a centre piece having a higher flexibility than the two end portions, said higher flexibility increasing towards the middle of the centre piece.

The structural design of the centre piece of the milk hose permits, on the basis of the increase in elasticity in a defined area (centre piece) of the milk hose, an absorption of twisting and bending forces by elastic deformation, the end portions, especially the transitions to the connecting necks, having hardly any load applied thereto. This effect is supported especially by the flexibility of the milk hose which increases towards the centre, since the radius of curvature of the milk hose is larger in the vicinity of the end portions than in the area of the centre of the hose and since, consequently, the mechanical load applied to the end portions is less high.

In accordance with an advantageous embodiment, the centre piece comprises spaced-apart reinforcement elements enclosing, at least partially, the circumference of a certain area of the centre piece. This kind of structure permits a wall thickness which is fundamentally smaller than the wall thickness that could be used for a milk hose having no reinforcement elements. The areas between the reinforcement elements have therefore a high elasticity, the stability vis-a-vis the pressure difference being guaranteed by the reinforcement elements.

It will be suitable when the reinforcement elements consist, at least partially, of a material whose elasticity is lower than that of the material which has been used for producing an

area between said spaced-apart reinforcement elements. A big difference in the elasticities of successive areas permits the creation of reinforcement elements having e.g. a high dimensional stability so that a larger distance can be used, and this will, in turn, lead to a higher elasticity of the intermediate space (material of high elasticity) and therefore of the whole centre piece.

In accordance with a further preferred embodiment, the reinforcement elements contain a metal or a plastic material whose hardness is greater than that of the hose. Minimum dimensions in combination with high strength can be achieved, when e.g. rings or clips consisting of metal or of a hard plastic material are integrated in the hose wall of the centre piece.

In accordance with a further advantageous embodiment, the distance between the reinforcement elements decreases from the middle of the centre piece towards the respective first and second end portions. By means of this arrangement a decrease in the flexibility of the milk hose from the middle towards the outside is achieved, whereby it is guaranteed that a curvature of the element will occur substantially in the middle of the hose.

According to a further preferred embodiment, the reinforcement elements are implemented as spaced-apart elevations enclosing the circumference of the centre piece at least partially. This structure of the reinforcement elements has the advantage that the reinforcement elements may perhaps be applied subsequently to a suitably shaped milk hose.

In accordance with an advantageous embodiment, the wall thickness in an elevation exceeds the wall thickness in an area in which no spaced-apart elevations exist. Due to the increased amount of material provided in the area of an elevation, the necessary mechanical stability vis-a-vis the pressure differences occurring is guaranteed, even if the effective wall thickness of the areas between two elevations on the outer edge of the curvature of the hose will be reduced when the centre piece is being bent. Hence, it is possible to produce the centre piece from a uniform material.

According to another preferred embodiment, the whole flexible milk hose is produced from a uniform material. The milk hoses can therefore be produced at a moderate price.

In accordance with a further advantageous embodiment of the present invention, the elevations and the areas between two respective neighbouring, spaced-apart elevations have substantially the same wall thickness. Due to this structural design, which is similar to that of a bellows, the milk hose is particularly flexible and it is especially also adapted to be stretched and compressed, respectively, in the longitudinal direction. By enlarging the wall thickness in this area, it is possible to achieve by means of said increased wall thickness, in spite of the bellows-like structural design, a good stability against deformations of the interior diameter caused by pressure fluctuations and to maintain simultaneously a high flexibility, especially in the longitudinal direction. In addition, this embodiment is particularly suitable for imitating the natural sucking of the calf on the teat of the brood animal on the basis of the compression and stretching taking place in the longitudinal direction of the centre piece of the flexible milk hose during the change-over from the suction phase to the relief phase. On the basis of this alternating stretching and compression of the milk hose, the pendulum motion of the milking unit produced by the pressure differences occurring during the change-over from one phase to the other will be intensified and the teats will additionally be stimulated and the muscles of the udder relaxed in the rhythm of the phase change, similar to the effect produced when a calf is sucking on the udder.

In accordance with a further preferred embodiment, the first and second end portions have each formed thereon a reinforcement element. This measure serves to achieve a higher bending stiffness especially in the connection area of the milk hose, whereby bending will substantially occur in the centre piece, as intended, when a mechanical load is applied to the milk hose. This will reduce the risk of tearing of the hose, especially at the transition from the connecting neck to the connection element.

It will be advantageous when the wall thickness of the reinforcement elements exceeds that of the residual area of the first and second end portions. It is thus possible to stiffen the end portions, even if the milk hose is produced from one uniform material.

In accordance with another preferred embodiment, the interior diameter of the centre piece does not vary in this area. In the case of this embodiment, the flow of the stream of milk will not be impaired by interaction with the inner surface, e.g. by the formation of vortices on indentations on said surface. Furthermore, the fluid connection element can be cleaned

easily.

According to another preferred embodiment, the wall thickness of the centre piece decreases from the first and second end portion towards the middle of said centre piece.

This permits the milk hose to be produced in a simple way, since the outer surface can be implemented as a smooth surface. The minimum wall thickness in the central area is chosen such that a sufficient dimensional stability of the milk hose under vacuum is still guaranteed. The wall thickness of the centre piece preferably decreases continuously towards the middle. It is, however, also possible to provide a step-like profile of the wall thickness; in this case, the axial dimensions of each of the respective areas of different wall thicknesses can be identical or different.

In accordance with a further preferred embodiment, the wall thickness of the reinforcement elements is smaller in the area of the middle of the centre piece than the wall thickness of the reinforcement elements arranged in the boundary area of said centre piece.

According to another preferred embodiment, the wall thickness of the reinforcement elements decreases continuously towards the middle of the centre piece.

In accordance with a further preferred embodiment, the wall thickness of the intermediate areas between two neighbouring reinforcement elements is smaller in the area of the middle of the centre piece than the wall thickness of the intermediate areas of the reinforcement elements arranged in the boundary area of said centre piece.

According to another preferred embodiment, the wall thickness of the intermediate areas decreases continuously towards the middle of said centre piece.

The present invention will now be explained and described in detail making reference to embodiments and the drawing enclosed, which refer to these embodiments and in which:

Fig. 1 shows a schematic, three-dimensional representation of a milking unit;

Fig. 2 shows a side view of one embodiment of the milk hose according to the present invention;

Fig. 3 shows a cross-section of the embodiment according to Fig. 1;

Fig. 4 shows a representation of the milk hose of the present invention in the bent condition of the hose; and

Fig. 5 shows a cross-section through a further embodiment of the milk hose of the present invention.

Fig. 6a-6d each show a cross-section through the central area of the centre piece of the milk hose according to further preferred embodiments.

A first embodiment is now explained making reference to Fig. 1, 2 and 3.

Fig. 1 shows the fundamental structural design of a milking unit in which short milk hoses are used in accordance with one embodiment of the present invention. Reference numeral 1 stands for the four teat cups at the upper edge of which the bulge of the teat rubber 2 is formed. The outlet neck 3 is arranged at the other end of the teat cup 1. The teat rubber 2 extends in the interior of the teat cup 1 down to the outlet neck 3. An inlet neck for the connection conduit by means of which fresh air is blown into the area between the teat cup 1 and the teat rubber 2 so as to change over from the suction phase to the relief phase is not shown in Fig. 1 for the sake of clarity. The outlet necks 3, which are formed on or attached to the teat rubbers, have short milk hoses 4 connected thereto. Instead of being separate parts, the teat rubber and the short milk hoses can also be implemented as an integral component (long teat rubber).

A multiway valve 5 with a milk inlet neck 8 and milk outlets 6 and 7 is connected to the teat cups 1 by means of said short milk hoses 4. The short milk hose 4 comprises a first end portion 9 which is pushed onto the connection neck 3 and a second end portion 10 which is pushed onto the connection neck 8, and a centre piece 11. The end portions 9 and 10 are each provided with beadlike, enlarged portions 12 and 13, respectively, which increase the stiffness of this area. Kinking of the hoses, which often occurs in the connection areas, will

by excluded in this way. The centre piece 11 of the short milk hose 4 is provided with spaced-apart annular elevations 14 along a certain area thereof.

Fig. 2 shows a side view of the short milk hose 4 in accordance with the first embodiment of the present invention. In Fig. 2 identical parts are designated by the same reference numerals as in Fig. 1. It can be seen in this figure that, in the case of this embodiment, the respective elevations in the middle of the centre piece 11 have smaller axial dimensions than the elevations in the end portions 10 and 9 of said centre piece. The density of the elevations, i.e. their number per unit length, remains preferably constant over the length of the centre piece 11. The elevations 14 of this embodiment as well as all the other components of the short milk hose 4 are produced from the same elastic material. It is, of course, possible to use different materials for the various areas. The end portions 10 and 9 may, for example, consist of a mixture of materials including additives which make the material more stable, since these areas do not come into direct contact with the flow of milk. In addition, it is also imaginable to implement the elevations such that they have a uniform but smaller width, and to provide them with reinforcing rings or clips of a mechanically very stable material as a compensation. Metal rings or metal clips may e.g. guarantee a very high mechanical stability when used in combination with an elevation of minimum width.

Fig. 3 shows a short milk hose 4 in a cross-section along line 2-2 of Fig. 2. Identical parts have again been designated by identical reference numerals according to Fig. 1 and 2. The embodiment of the milk hose 4 shown in these figures has a smooth inner surface 15.

Fig. 4 shows the embodiment according to Fig. 1 to 3 in a side view, in a bent condition of the milk hose. In this representation, it can be seen that, when the short milk hose 4 is bent, the elevations 14 in the middle of the centre piece 11 will be stretched on the outer side of the curve, whereas the elevations 14 in the vicinity of the end portions 10 and 9 will almost maintain their axial dimensions. On the inner side of the curve, the elevations 14 located in the middle are, consequently, compressed more strongly than those located in the vicinity of the end portions. It follows that the milk hose 4 has in the middle of the centre piece a curvature which is larger than that in the vicinity of the end portions.

When the milking process is taking place and when the milking unit is being handled, the positions of the teat cups and, consequently, of the comparatively heavy directional valve

Fig. 5 shows a cross-section through a short milk hose according to a further embodiment of the present invention. A short milk hose 104 is provided with respective end portions 109 and 110. The end portions 109 and 110 have formed thereon beadlike enlarged portions 112 and 113, respectively. A centre piece 111 is provided with elevations 114 in a certain area thereof. Other than in the case of the preceding embodiments, the wall thicknesses of the elevations and of the areas between two respective neighbouring elevations are approximately equal. By means of this structural design, a particularly high flexibility is achieved. With the aid of this bellows-like structure of part of the centre piece 111 a high flexibility is advantageously achieved in the axial direction of the short milk hose. The effect of compensating the various heights of the teat cups during the milking operation is supported in this way. Furthermore, the high axial flexibility of the centre piece 111 can be utilized for producing a pendulum motion of the whole milking unit in the rhythm of the change-over from one phase to the other so as to achieve an additional stimulation of the teats and a relaxation of the udder muscles. The vacuum applied to the teats and therefore also to the short milk hose in the suction phase is higher than that applied in the relief phase. The

character of this desired behaviour, which imitates the natural sucking of a calf, is, however, strongly dependent on the respective milking unit and its mode of operation. During the suction phase, a negative pressure is applied to the teat and, consequently, to the milk hose, said negative pressure imitating the suction behaviour of the calf to a greater or lesser degree depending on the respective plant. This negative pressure causes a contraction of the centre piece 111 in the suction phase, whereby the directional valve will be raised slightly. In the relief phase, however, the reduced negative pressure leads to an expansion of the centre piece 111 and thus to a lowering of the directional valve. This causes a pendulum motion of the directional valve and of the milk hoses, which leads to an additional stimulation of the teats and a relaxation of the udder muscles, and this will enhance the flow of milk. The effect of the pendulum motion of the milking unit caused by the increased axial flexibility of the centre pieces of the short milk hoses can be utilized in a particularly advantageous manner in connection with milking plants permitting a sufficient control of the negative pressure difference during the suction and relief phases, since particularly great changes in length will then take place. DE 2523465 describes e.g. a teat cup in the case of which a small, precisely defined amount of atmospheric air is blown into the area between the collapsing teat rubber enclosing the teat and the milk plug flowing off at the beginning of the relief phase, whereby the milk can flow off unhindered due to the reduced negative pressure above the milk plug. If no air were blown into this area, an area of higher negative pressure would be created above the milk plug which is just flowing off and, due to the suction effect, only part of the milk plug would flow off. Due to the additional amount of air, the milk can, however, flow off unhindered and a negative pressure, which is lower than the negative pressure prevailing during the suction phase, will build up also in the short milk hose so that a marked pressure difference will exist in the short milk hose during the two operating phases. The mechanical stimulation of the teats and the relaxation of the muscles of the udder leads to an increase in the flow of milk on the one hand and supports the health of the udder on the other, i.e. it also leads to an increase in the yield of milk in the long run. In order to increase the stability against changes of the interior diameter caused by the negative pressure in the interior of the hose, the average wall thickness in the area of the centre piece 111 having the bellows-like structure can e.g. be chosen such that it exceeds the wall thickness of the centre piece in the area in which no elevations are formed. In addition, it is also here imaginable that thin reinforcement rings or clips, which enclose only part of the circumference of the elevations, are attached to said elevations so as to achieve the necessary stability.

Fig. 6a to 6d each show a cross-section through the central area of the centre piece of additional embodiments of the milk hose according to the present invention.

In Fig. 6a, a central area 204 of a flexible milk hose is provided with reinforcement elements 214. The reinforcement elements 214, which may be produced from the same material as the rest of the milk hose, have a wall thickness which decreases towards the middle, i.e. the additional layer of material of the reinforcement elements decreases in thickness towards the middle. In Fig. 6a, the central reinforcement element is represented as the element with the thinnest layer of material and the elements located further away from the middle have increasingly thicker layers of material and wall thicknesses. It is, however, also possible that one group comprises a plurality of reinforcement elements of identical wall thickness and that the centrally located group has the smallest wall thickness. It follows that the outer diameter of the milk hose decreases in size towards the middle due to the reduced wall thickness.

In Fig. 6b, the outer diameter remains approximately the same. The increase in flexibility towards the middle is achieved by the circumstance that the intermediate areas between the reinforcement elements 214 have increasingly smaller wall thicknesses.

Fig. 6c shows an embodiment in the case of which the wall thickness of the intermediate areas decreases towards the middle, whereas the wall thickness of the reinforcement elements 214 slightly increases towards the middle so as to guarantee a better dimensional stability of the central area 204. The smaller wall thickness in the middle will, however, nevertheless guarantee an increase in flexibility towards the middle.

Fig. 6d shows an embodiment in the case of which the reinforcement elements 214 are implemented with identical wall thicknesses, said reinforcement elements being, however, arranged so to speak on a centre piece whose wall thickness decreases towards the middle centre. In certain circumstances, this may be advantageous in comparison with the embodiment shown in Fig. 6a, since the reinforcement elements in Fig. 6d are less sensitive to external mechanical loads, for example to being trodden on.

In accordance with a further embodiment, reinforcement elements are completely dispensed with and the wall thickness of the centre piece is reduced towards the middle. The wall thickness can be reduced continuously or in steps.

Claims

1. A flexible milk hose for connecting a teat cup to a multiway valve in an automatic milking plant, comprising:

a first end portion for connection to a connecting neck of the teat cup,

a second end portion for connection to a connecting neck of the multiway valve, and

a centre piece, wherein

the centre piece has a higher flexibility than said first and second end portions, said higher flexibility increasing towards the middle of the centre piece.

2. A flexible milk hose according to claim 1, wherein

the centre piece comprises spaced-apart reinforcement elements enclosing, at least partially, the circumference of a certain area of the centre piece.

3. A flexible milk hose according to claim 2, wherein

the reinforcement elements are made, at least partially, of a material whose elasticity is lower than that of a material which has been used for producing an area between said spaced-apart reinforcement elements.

4. A flexible milk hose according to claim 3, wherein

the reinforcement elements comprise a metal or a plastic material or other materials whose hardness is greater than that of the milk hose.

5. A flexible milk hose according to claims 3 or 4, wherein

the distance between two respective neighbouring reinforcement elements decreases from the middle of the centre piece towards the respective first and second end portions.

6. A flexible milk hose according to claims 1, 2 or 5, wherein

the reinforcement elements are implemented as spaced-apart elevations of material enclosing the circumference of the centre piece at least partially.

7. A flexible milk hose according to claim 6, wherein

the wall thickness of the elevations of material exceeds the wall thickness in an area between neighbouring, spaced-apart elevations of material.

8. A flexible milk hose according to claim 6, wherein

the elevations of material and the areas between two respective neighbouring elevations of material have substantially the same wall thickness.

9. A flexible milk hose according to claims 1 to 8, wherein

the first and second end portion have each formed thereon a reinforcement element.

10. A flexible milk hose according to claim 9, wherein

the reinforcement elements each comprise enlarged portions of material whose wall thickness exceeds the wall thickness of the respective residual area of the first and second end portions.

11. A flexible milk hose according to claims 1 to 10, wherein

the centre piece consists, at least partially, of a permanently chemically passive and stable material which will not give off secretions to the milk during the milking operation.

12. A flexible milk hose according to claim 1, wherein

a wall thickness of the centre piece decreases from the first and second end portions towards the middle of said centre piece.

13. A flexible milk hose according to claims 2 to 10, wherein

the wall thickness of the reinforcement elements is smaller in the area of the middle of the centre piece than the wall thickness of the reinforcement elements arranged in the boundary area of the centre piece.

14. A flexible milk hose according to claim 13, wherein

the wall thickness of the reinforcement elements decreases continuously towards the middle of the centre piece.

15. A flexible milk hose according to claims 2 to 14, wherein

the wall thickness of the intermediate areas between two neighbouring reinforcement elements in the area of the middle of the centre piece is smaller than the wall thickness of the intermediate areas of the reinforcement elements arranged in the boundary area of said centre piece.

16. A flexible milk hose according to claim 15, wherein

the wall thickness of the intermediate areas decreases continuously towards the middle of said centre piece.

Abstract

An automatic milking plant is provided with a short milk hose, which, due to spaced-apart elevations in its centre piece, has sufficient mechanical stability vis-a-vis pressure differences as well as a high flexibility. The use of the short milk hose according to the present invention leads to a reduction of the mechanical strain on the udder and thus also reduces irritations of the animal to be milked.

1/3

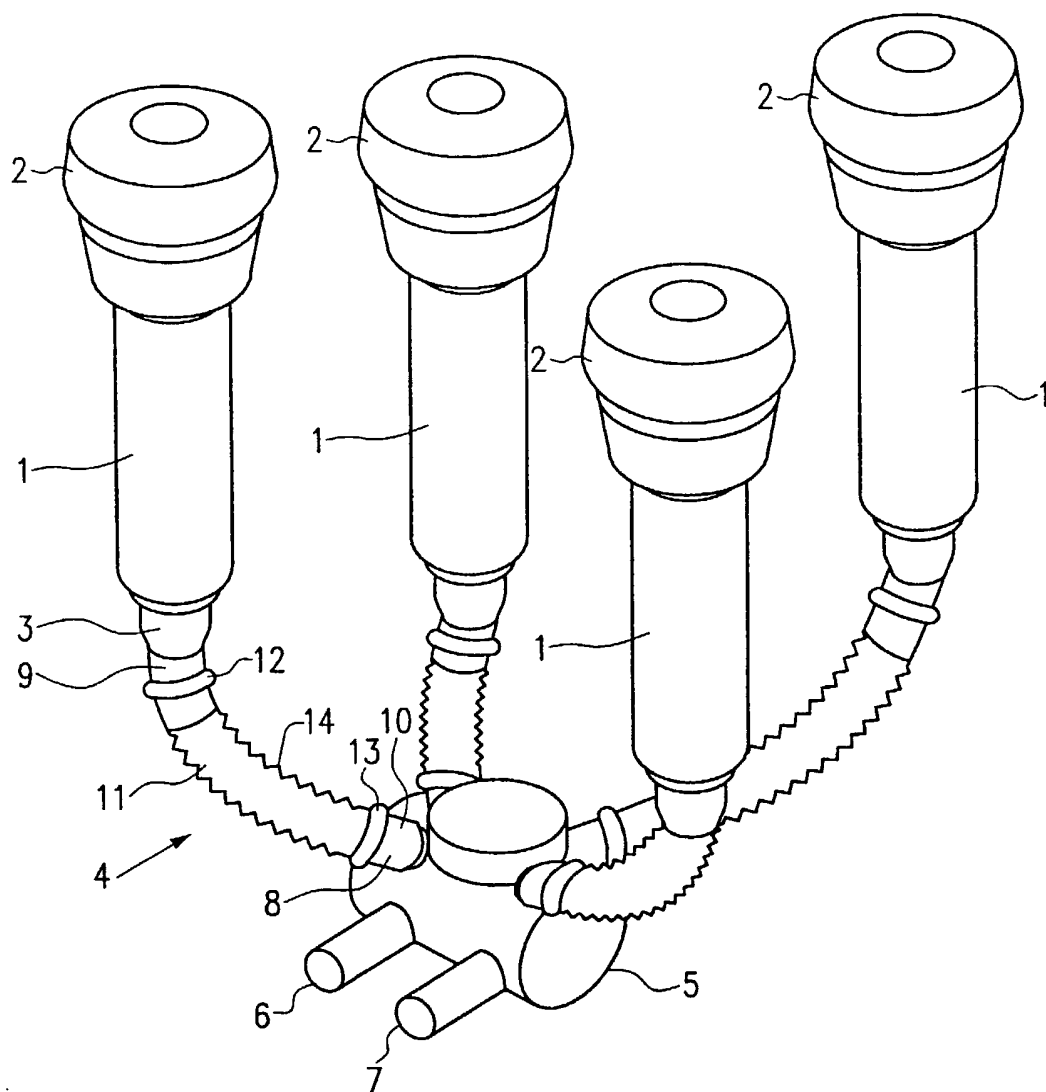


FIG. 1

2/3

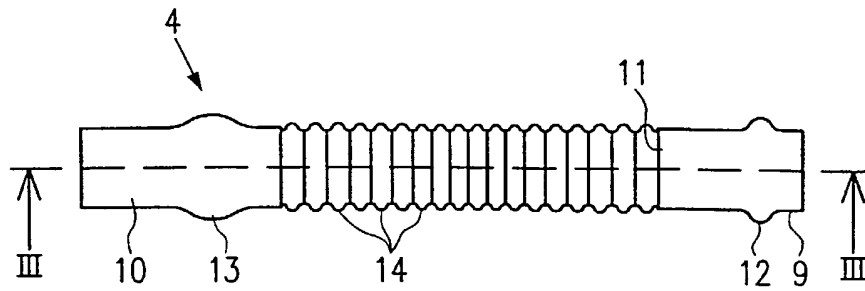


FIG. 2

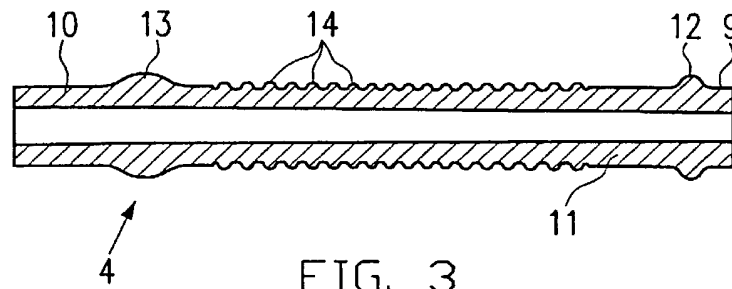


FIG. 3

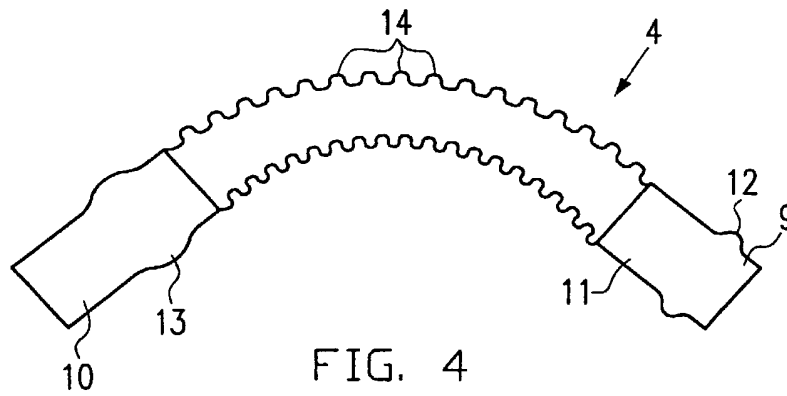


FIG. 4





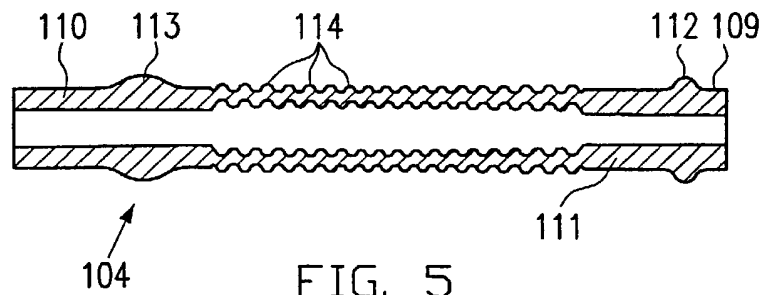


FIG. 5

3/3

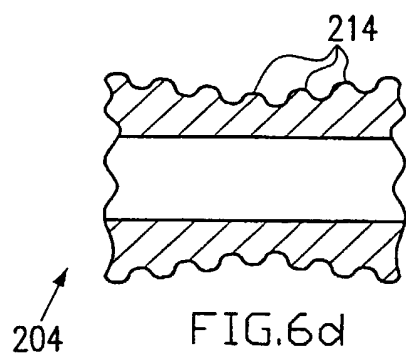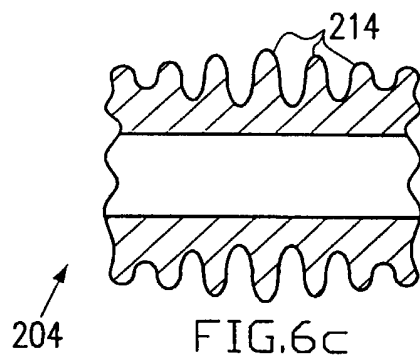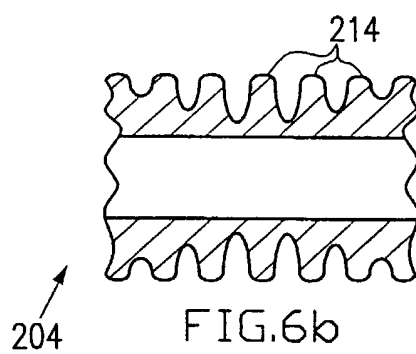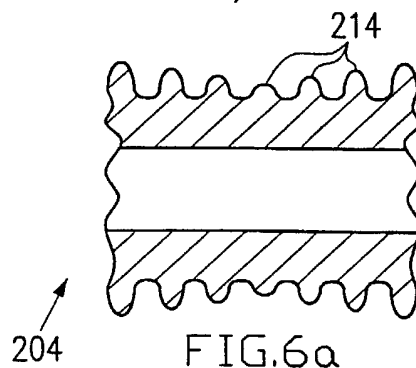

Under the Paperwork Reduction Act of 1995, no person is required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney for Patent Application Erklärung für Patentanmeldungen mit Vollmacht

German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides
Statt:

daß mein Wohnsitz, meine Postanschrift und meine Staatsangehörigkeit den im nachstehenden nach meinem Namen aufgeführten Angaben entsprechen, daß ich nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent für die Erfindung mit folgendem Titel beantragt wird:

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe I am the original, first and sole inventor(if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

FLEXIBLE MILKING TUBE FOR AN

AUTOMATIC MILKING PLANT

deren Beschreibung hier beigelegt ist, es sei denn (in diesem Falle Zutreffendes bitte ankreuzen), diese Erfindung

☐ wurde angemeldet am _____
unter der US-Anmeldenummer oder unter der
Internationalen Anmeldenummer im Rahmen des
Vertrags über die Zusammenarbeit auf dem Gebiet
des Patentwesens (PCT)
_____ und am _____
_____ abgeändert (falls
zutreffend).

the specification of which is attached hereto unless the following box is checked:

26 was filed on May 11, 2000
as United States Application Number or PCT
International Application Number
PCT/EP00/04281 and was amended on
(if applicable).

Ich bestätige hiermit, daß ich den Inhalt der oben angegebenen Patentanmeldung, einschließlich der Ansprüche, die eventuell durch einen oben erwähnten Zusatzantrag abgeändert wurde, durchgesehen und verstanden habe.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

Ich erkenne meine Pflicht zur Offenbarung jeglicher Informationen an, die zur Prüfung der Patentfähigkeit in Einklang mit Titel 37, Code of Federal Regulations, § 1.56 von Belang sind.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

[Page 1 of 3]

German Language Declaration

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäß Title 35, US-Code, § 119 (a)-(d), bzw. § 365(b) aller unten aufgeführten Auslandsanmeldungen für Patente oder Erfinderrkunden, oder § 365(a) aller PCT internationalen Anmeldungen, welche wenigstens ein Land ausser den Vereinigten Staaten von Amerika benennen, und habe nachstehend durch ankreuzen sämtliche Auslandsanmeldungen für Patente bzw. Erfinderrkunden oder PCT internationale Anmeldungen angegeben, deren Anmeldetag dem der Anmeldung, für welche Priorität beansprucht wird, vorangeht.

Prior Foreign Applications
(Frühere ausländische Anmeldungen)

199 22 131.6 GERMANY
(Number) (Country)
(Number) (Land)

(Number) (Country)
(Number) (Land)

Ich beanspruche hiermit Prioritätsvorteile unter Title 35, US-Code, § 119(e) aller US-Hilfsanmeldungen wie unten aufgezählt.

(Application No.) (Filing Date)
(Anmeldungszeichen) (Anmeldetag)

(Application No.) (Filing Date)
(Anmeldungszeichen) (Anmeldetag)

Ich beanspruche hiermit die mir unter Title 35, US-Code, § 120 zustehenden Vorteile aller unten aufgeführten US-Patentanmeldungen bzw. § 365(c) aller PCT internationalen Anmeldungen, welche die Vereinigten Staaten von Amerika benennen, und erkenne, insofern der Gegenstand eines jeden früheren Anspruchs dieser Patentanmeldung nicht in einer US-Patentanmeldung, bzw. PCT internationalen Anmeldung in in einer gemäß dem ersten Absatz von Title 35, US-Code, § 112 vorgeschriebenen Art und Weise offenbart wurde, meine Pflicht zur Offenbarung jeglicher Informationen an, die zur Prüfung der Patentfähigkeit in Einklang mit Title 37, Code of Federal Regulations, § 1.56 von Belang sind und die im Zeitraum zwischen dem Anmeldetag der früheren Patentanmeldung und dem nationalen oder im Rahmen des Vertrags über die Zusammenarbeit auf dem Gebiet des Patentwesens (PCT) gültigen internationalen Anmeldetags bekannt geworden sind.

(Application No.) (Filing Date)
(Anmeldungszeichen) (Anmeldetag)

(Application No.) (Filing Date)
(Anmeldungszeichen) (Anmeldetag)

Ich erkläre hiermit, daß alle in der vorliegenden Erklärung von mir gemachten Angaben nach bestem Wissen und Gewissen der Wahrheit entsprechen, und ferner daß ich diese eidesstattliche Erklärung in Kenntnis dessen ablege, daß wissenschaftlich und vorsätzlich falsche Angaben oder dergleichen gemäß § 1001, Title 18 des US-Code strafbar sind und mit Geldstrafe und/oder Gefängnis bestraft werden können und daß derartige wissenschaftlich und vorsätzlich falsche Angaben die Rechtswirksamkeit der vorliegenden Patentanmeldung oder eines aufgrund deren erteilten Patentes gefährden können.

I hereby claim foreign priority under Title 35, United States Code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

Priorität nicht beansprucht

12 May, 1999

(Day/Month/Year Filed)
(Tag/Monat/Jahr der Anmeldung)

☐

(Day/Month/Year Filed)
(Tag/Monat/Jahr der Anmeldung)

☐

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Status) (patented, pending, abandoned)
(Status) (patentiert, schwebend, aufgegeben)

(Status) (patented, pending, abandoned)
(Status) (patentiert, schwebend, aufgegeben)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

German Language Declaration

VERTRETUNGSVOLMACHT: Als benannter Erfinder beauftrage ich hiermit den (die) nachstehend aufgeführten Patentanwalt (Patentanwälte) und/oder Vertreter mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Angelegenheiten vor dem US-Patent- und Markenamt: (Name(n) und Registrationsnummer(n) auflisten)

Dale H. Thiel, Reg. No. 24 323
 David G. Boutell, Reg. No. 24 072
 Ronald J. Tanis, Reg. No. 22 724
 Terryence F. Chapman, Reg. No. 32 549
 Mark L. Maki, Reg. No. 36 589

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: (list name and registration number)

David S. Goldenberg, Reg. No. 31 257
 Sidney B. Williams, Jr., Reg. No. 24 949
 Liane L. Churney, Reg. No. 40 694
 Brian R. Tumm, Reg. No. 36 328
 Tricia R. Cobb, Reg. No. 44 621

David G. Boutell

Postanschrift: Flynn, Thiel, Boutell & Tanis, P.C.
2026 Rambling Road
Kalamazoo, Michigan 49008-1699

Telefonische Auskünfte: (Name und Telefonnummer)

Send Correspondence to:

David G. Boutell - (616) 381-1156

Direct Telephone Calls to: (name and telephone number)

Vor- und Zuname des einzigen oder ersten Erfinders	100	Full name of sole or first inventor	Jakob MAIER, Jr.
Unterschrift des Erfinders:	Datum	Inventor's signature	Date 27.11.01
Wohnsitz		Residence	Tuerkheim, FEDERAL REPUBLIC OF GERMANY DEU
Staatsangehörigkeit		Citizenship	FEDERAL REPUBLIC OF GERMANY
Postanschrift		Post Office Address	Griesstrasse 4 D-86842 Tuerkheim FEDERAL REPUBLIC OF GERMANY
Vor- und Zuname des zweiten Miterfinders (falls zutreffend)		Full name of second joint inventor, if any	
Unterschrift des zweiten Erfinders	Datum	Second Inventor's signature	Date
Wohnsitz		Residence	
Staatsangehörigkeit		Citizenship	
Postanschrift		Post Office Address	

(Im Falle dritter und weiterer Miterfinder sind die entsprechenden Informationen und Unterschriften hinzuzufügen.)

(Supply similar information and signature for third and subsequent joint inventors.)

[X] Th

(Page 3 of 3)
 this page.